
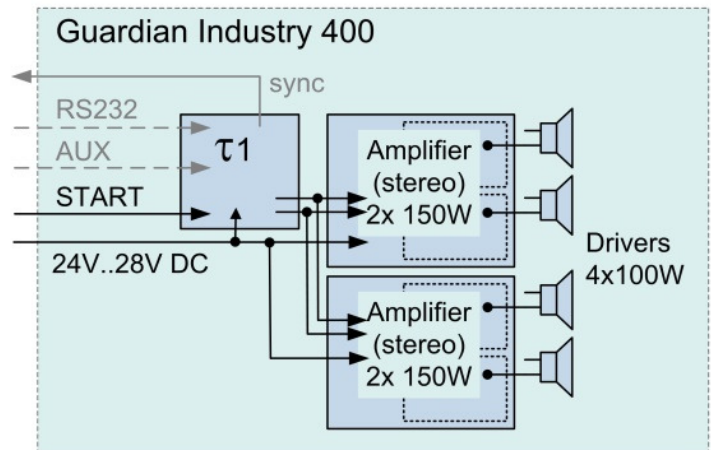


# GUARDIAN INDUSTRY 200/400

**Work safety** in industry includes also a question, what to do in case of industry disaster. Manipulation with dangerous chemicals or poisonous gases can result into their **accidental leak**. In such cases it is crucial to **evacuate the threatened area** very quickly to prevent the health damage or even casualties of workers in such area. For this purposes the **most effective are the sirens**.

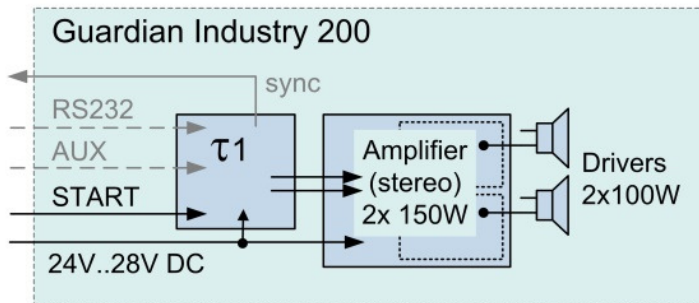

## Technical data 200W (400W)

Horn dimensions:	485 x 485 x 525 mm
Overall system weight:	26kg (31kg)
Power supply:	24-28V DC
Current max.	20A
Amplifier power:	2x150W (4x150W)
Output power:	2x100W /4Ohm (40x10W /4Ohm)
Acoustic output at 1m:	136dB(A)max. (140dB(A)max.)
Acoustic frequency:	200-4000Hz
No. of alarms:	64
Operating temperature:	-20 ... 60°C

### Supported audio files:

- MPEG 1 & 2 audio layer III (CBR +VBR +ABR)
- WMA 4.0/4.1/7/8/9 all profiles (5-384kbps)
- WAV (PCM + IMA ADPCM)
- General MIDI / SP-MIDI files

### Additional features:




- LEDs for status information
- AUX priority function
- Loop function
- Self test



**TAUSEC s.r.o.**  
Třebišovská 1  
04011 KOŠICE  
Slovak Republic


tel.: +421 903 81 95 98  
fax.: +421 55 6432 958  
www.tausec.com  
tausec@tausec.com

# GUARDIAN INDUSTRY 200/400

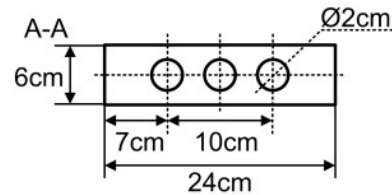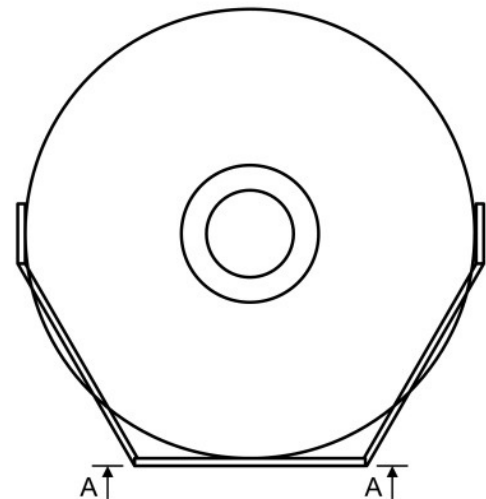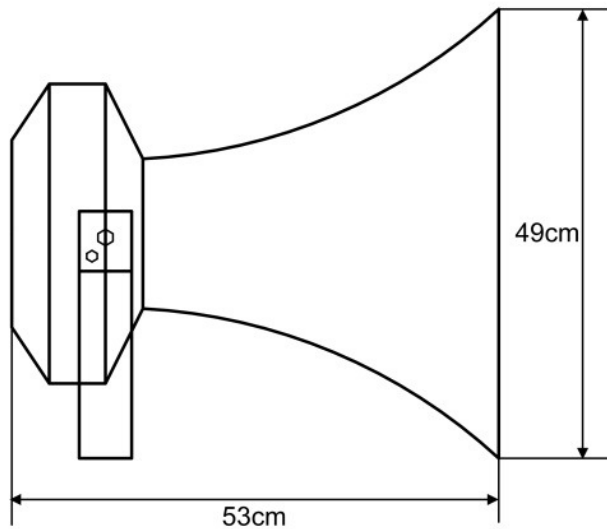

## Control unit and tone generator Tau1

Service Console  
RS 232

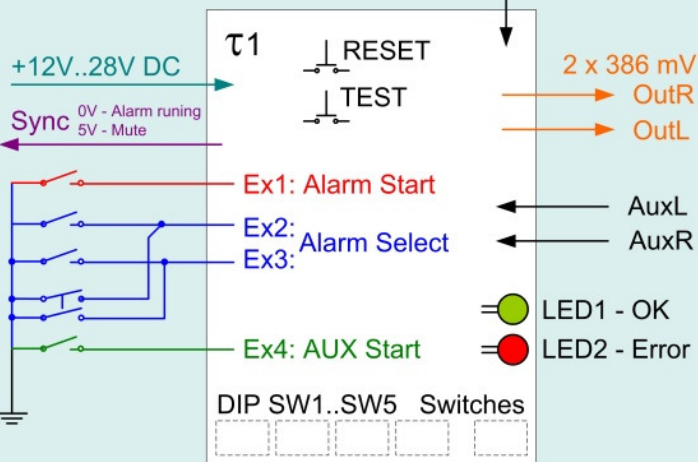

Guardian Industry siren is designed to be the **most simple and sturdy** as possible. Interface of the siren allows the connection by wire, radio control and even to use in existing warning system as an addition or replacement of the old sirens. **Output from the siren** can trigger another sirens, beacons, or other equipment as well as 100V public address system which can then reproduce the siren signal.



**TAUSEC s.r.o.**  
Třebišovská 1  
04011 KOŠICE  
Slovak Republic

tel.: +421 903 81 95 98  
fax.: +421 55 6432 958  
www.tausec.com  
tausec@tausec.com